



REPLACEMENT SHEET

1/14

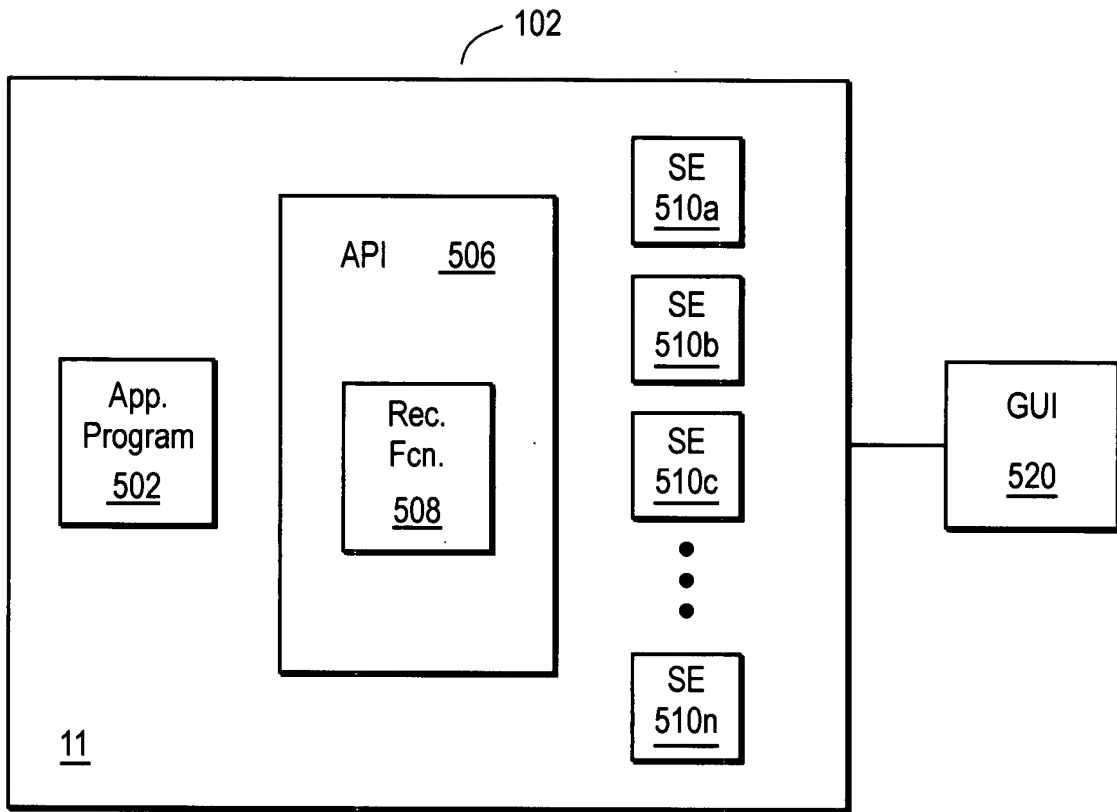


FIG. 1

2/14

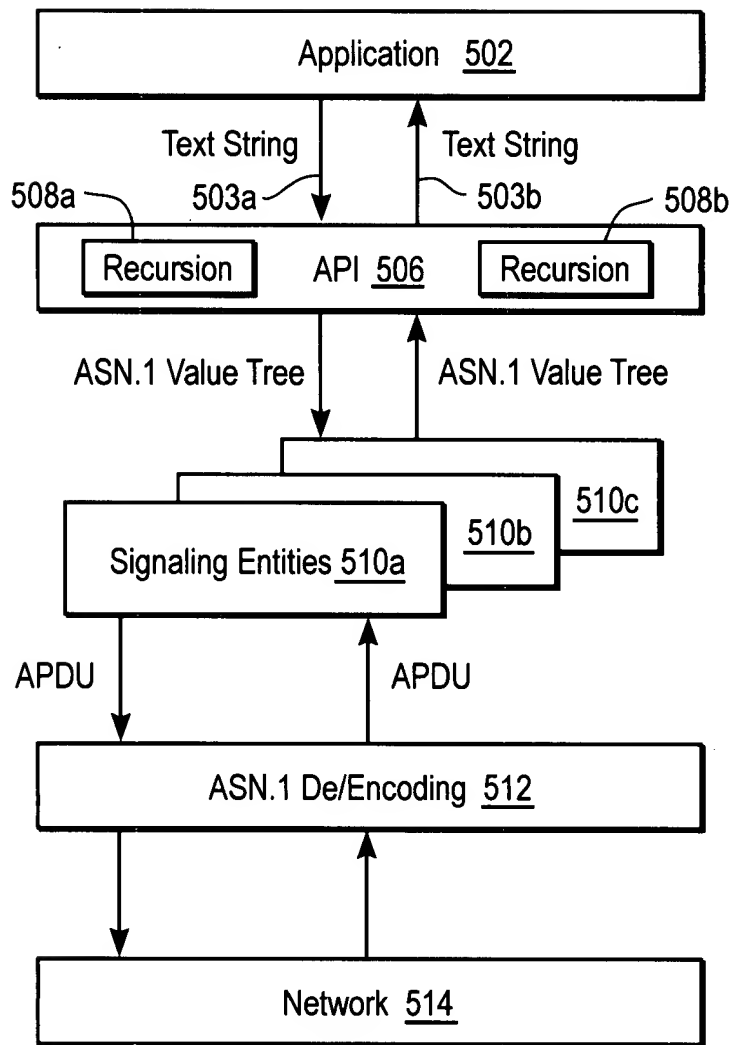


FIG. 2

3/14

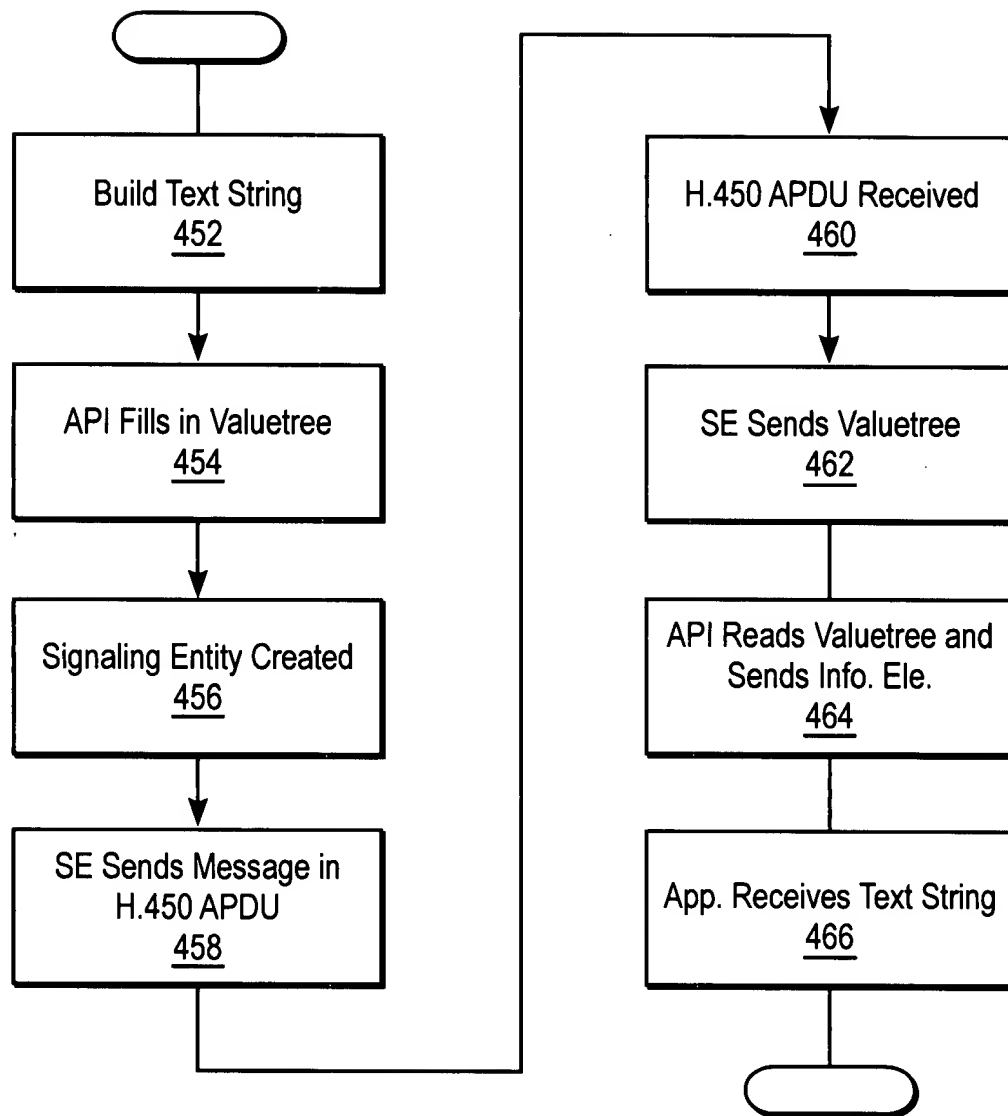


FIG. 3

4/14

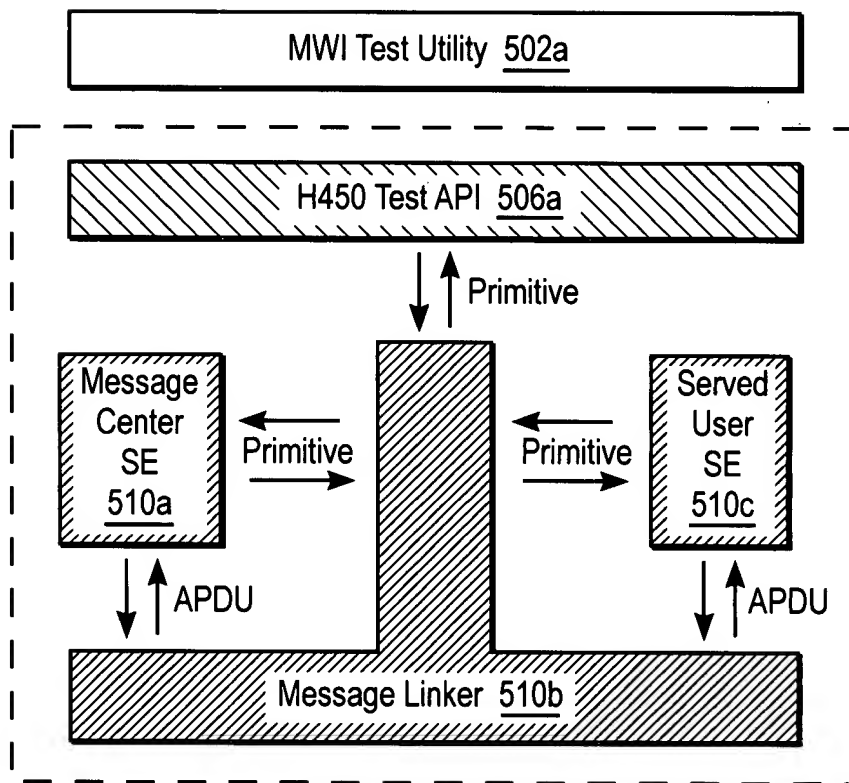


FIG. 4

MWIActivate

servedUserNr: 600

basicService 0815

msgCentreId:

nbOfMessages:

originatingNr:

timestamp:

priority:

FIG. 7

5/14

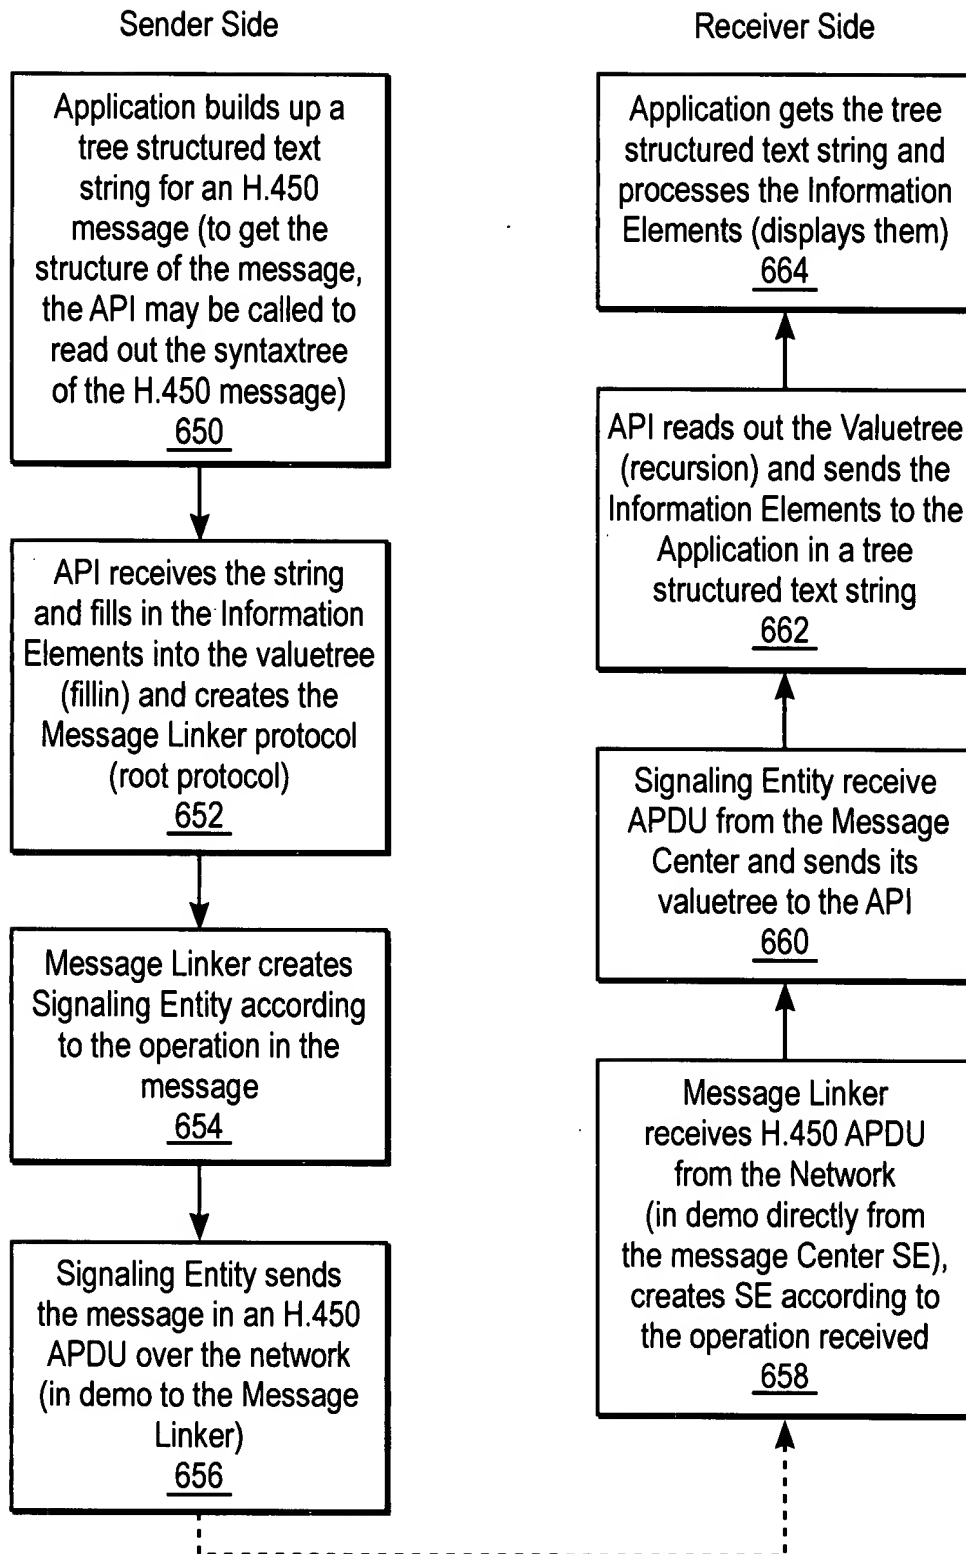


FIG. 5

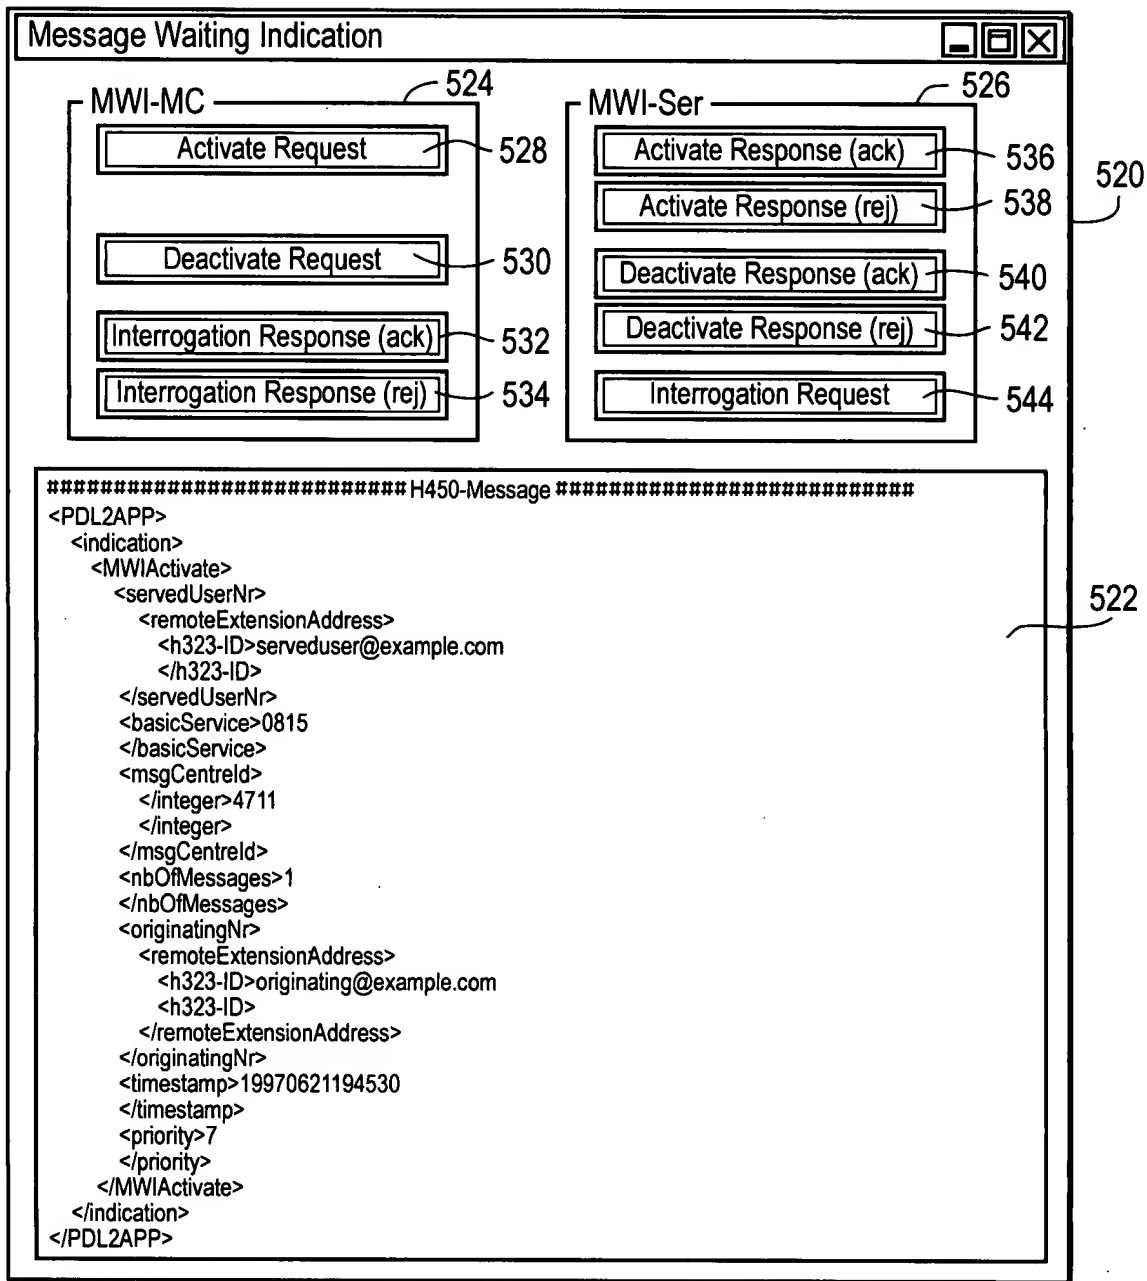


FIG. 6

7/14

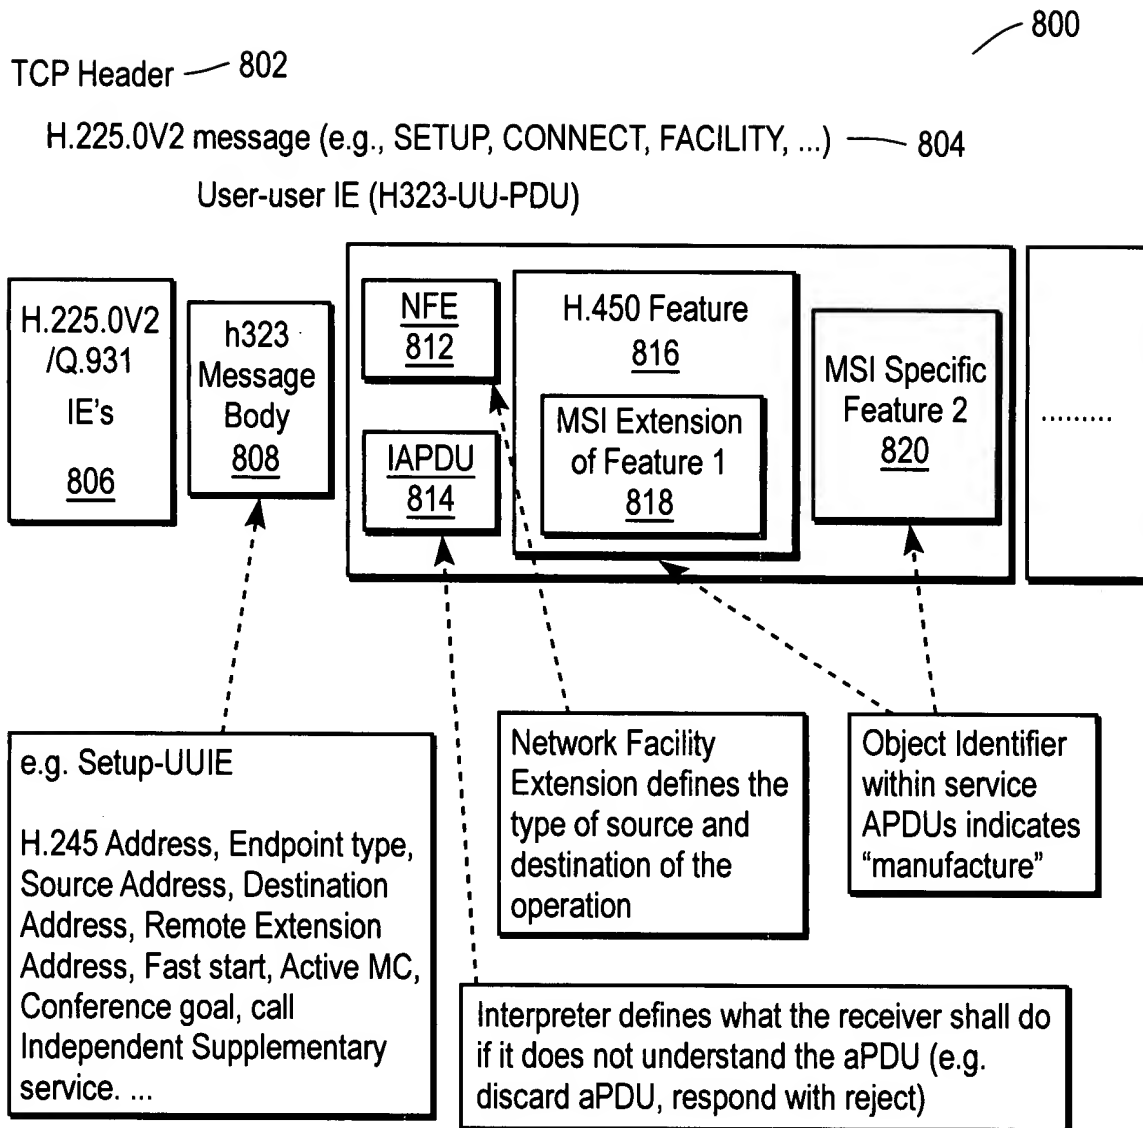


FIG. 8

8/14

H.450 Test Client v.1.0

RV Stack Version 2.1.2.3

☒ Sound Enabled

My Phone Number } 902
My Alias }

904a 904b 904c

received H450-Message

```
<H450AppSupplementaryService>
  <h2250CallSetupState>
    <setup>
    </setup>
  </h2250CallSetupState>
  <h4501SupplementaryService>
    <networkFacilityExtension>
      <sourceEntity>
        <anyEntity>
        </anyEntity>
      </sourceEntity>
      <sourceEntityAddress>
        <partyNumber>
          <privateNumber>
            <privateTypeOfNumber>
              <unknown>
              </unknown>
            </privateTypeOfNumber>
            <privateNumberDigits> 123
          </privateNumberDigits>
        </partyNumber>
      </sourceEntityAddress>
    </networkFacilityExtension>
  </h4501SupplementaryService>
</H450AppSupplementaryService>
```

900 906

FIG. 9

9/14

H.450.1 Information Elements ✕

Interpreter APDU
☒ reject AnyUnrecognizedInvokePdu 953 952

951

Network Facility Extension
☒ 955 956

Source Entity 958

Entity Type: anyEntity 960a 962

Source Entity Address 964

☒ Value: 123 966a

Type: partyNumber 968a

Party Number 970a

Type: privateNumber 972a

Private Party Number 974a

Type: unknown 976a

Public Party Number 978a

Type: unknown

Transport ID 978a

IP: 15

Port: 1

Destination Entity 960b

Entity: endpoint 964

Destination Entity Address 966b

☒ Value: 456 968b

Type: transportID 970b

Party Number 972b

Private Party Number 974b

Type: unknown 976b

Public Party Number 978b

Type: unknown

Transport ID 978b

IP: 11

Port: 2

950 954

980 Save 982 Send without APDU 984 Send with APDU

FIG. 10

10/14

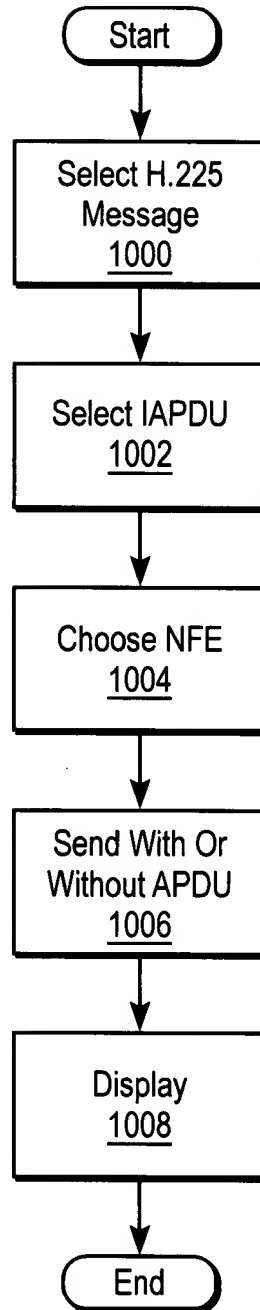


FIG. 11

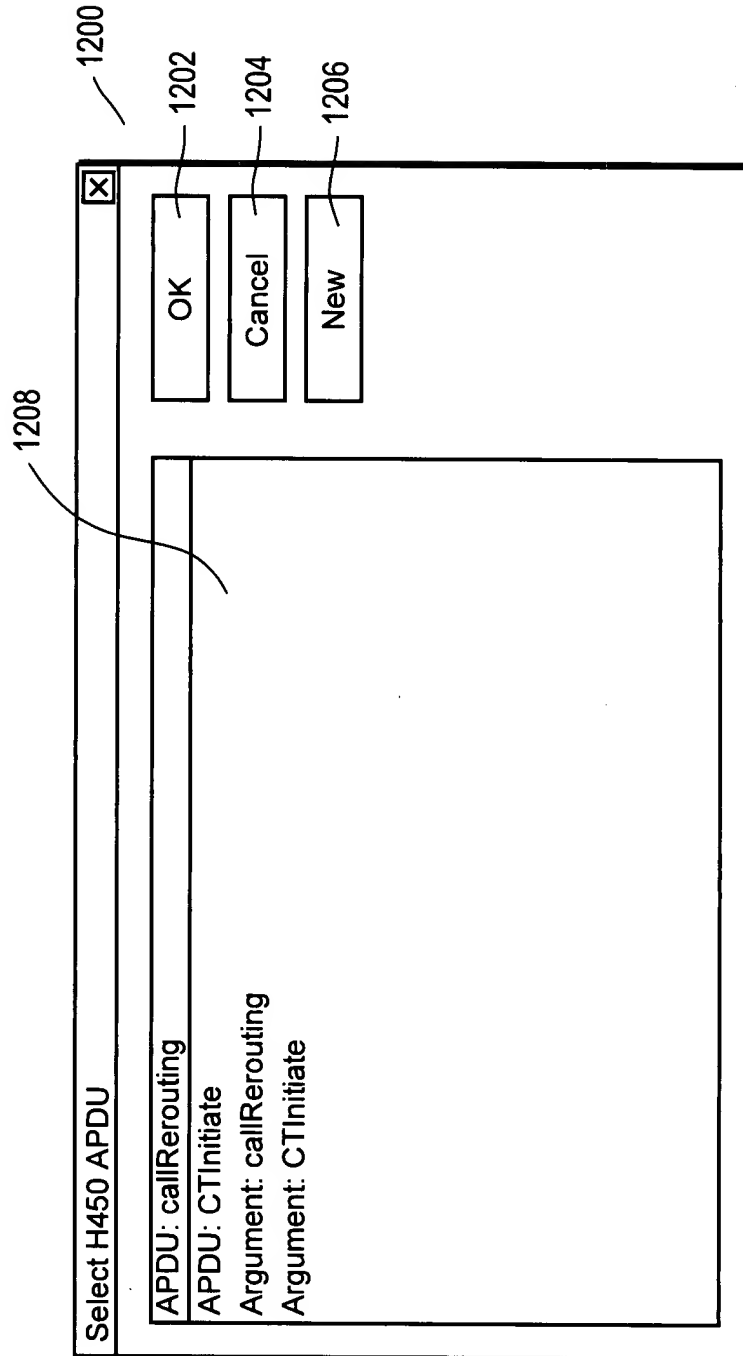


FIG. 12A

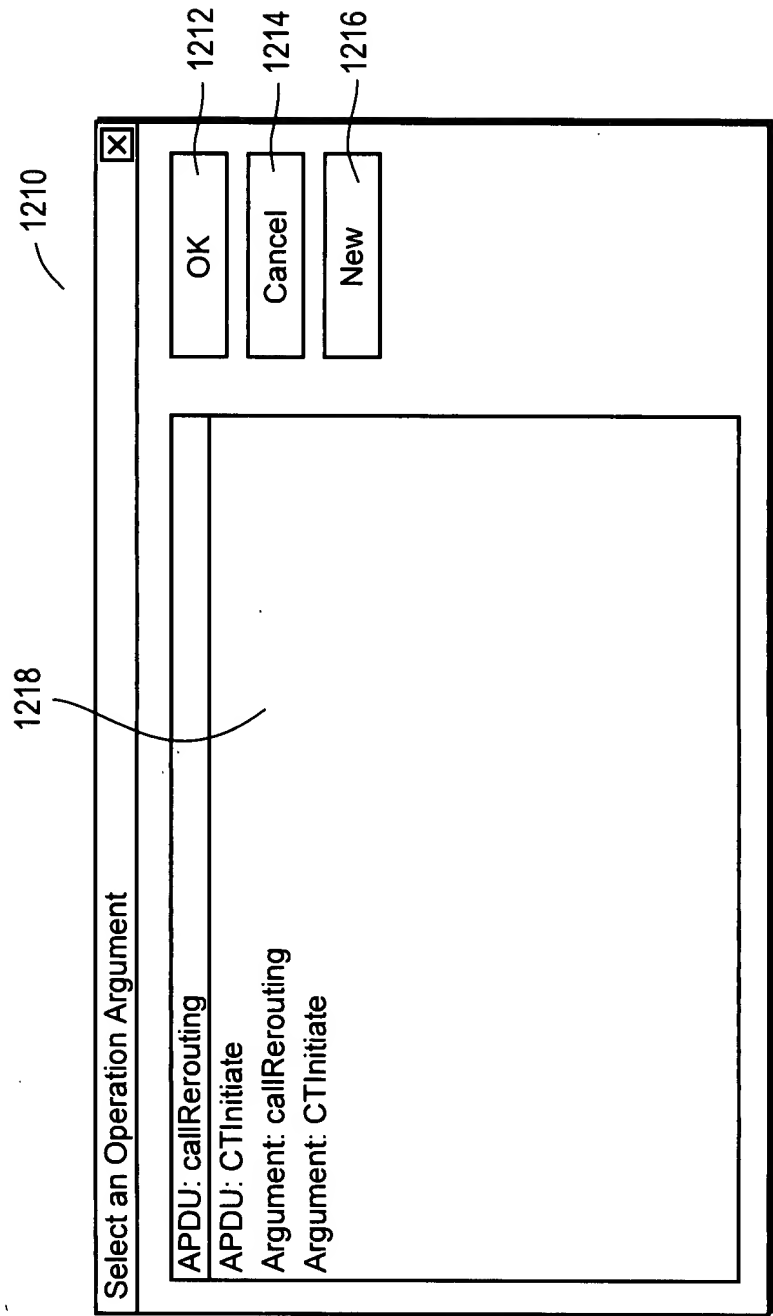


FIG. 12B

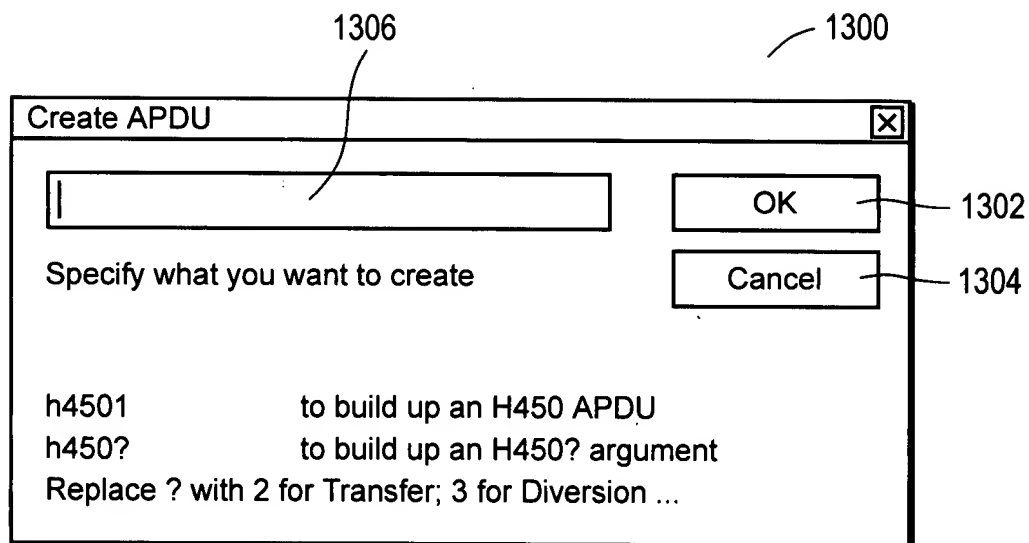


FIG. 13

REPLACEMENT SHEET

14/14

H450 Test Client

1400

v1.5 h450 test client.doc

Untitled - H450 APDU Builder

File Help Save

Save

Syntax Tree	Type	Value	from	to
h450SupplementaryService	Sequence			
networkFacilityExtension	Sequence			
sourceEntity	Choice			
andpoint	Null			
anyEntity	Null			
sourceEntityAddress	Choice			
e164	IA5String	30001	1..128	
h323-ID	BMPString		1..256	
urHD	IA5String		1..512	
transportID	Choice			
email-ID	IS5String		1..512	
partyNumber	Choice			
destinationEntity	Choice			
endpoint	Null			
anyEntity	Null			
destinationEntityAddress	IA5String			
e164	BMPString	30002	1..128	
h323-ID	IA5String		1..256	
urHD	Choice		1..512	
transportID	Choice			
email-ID	IA5String		1..512	
partyNumber	Choice			
interpretationApdu	Choice			
discardAnyUnrecognizedInvokePdu	Null			
clearCallAnyInvokePduNotRecognized	Null			
rejectAnyUnrecognizedInvokePdu	Null			
serviceApdu	Choice			
rosApdus	SequenceOf			
1	Choice			
invoke	Sequence			
invokeld	Integer	1	0..0	
linkedId	Integer	1	0..0	
opcode	Choice			
local	Integer	9	0..0	
global	ObjectIdentifier			
argument				

????

FIG. 14